



# Acuva Eco NX-Silver

---

## OWNER'S PRODUCT MANUAL

**Acuva Technologies Inc.**

Unit 1 - 3771 North Fraser Way, Burnaby, BC. Canada V5J 5G5

Telephone: 1-800-980-8810 | Email: [service@acuvatech.com](mailto:service@acuvatech.com)

[acuvatech.com](http://acuvatech.com)



## Summary

This document is the product manual for the Eco NX-Silver, and includes safety, product specifications, installation, and maintenance information.

---

## Table of Contents

Product Overview .....	3
Safety Information and Warnings .....	4
Warnings and Safety Precautions .....	4
Product Information .....	5
Specifications .....	5
Overview of Your Eco NX-Silver Water Purifier.....	5
Installation Guide .....	6
Installation Instructions.....	7
Mounting the Unit .....	8
Conditioning and Powering the Unit.....	8
Indicator Light .....	9
Maintenance .....	9
Regular Maintenance .....	9
Winterizing .....	9
Trouble Shooting .....	10
Standard Terms and Conditions .....	10
Warranty .....	11
Appendix A: Faucet Installation Instructions .....	12

---

## Product Overview

Congratulations on your purchase of the Eco NX-Silver UV-LED water purification system. This is our most compact and economical system that is ideally suited for single faucet applications, ice-makers, and water fountain upgrades. It fits easily under your sink in your home, cottage, RV and boat, and provides safe drinking water that is convenient, low maintenance and environmentally friendly.

Acuva's water disinfection systems take water purification to the next level of efficiency and convenience by utilizing two well-established and proven technologies: UVC disinfection and UVC-LEDs. Using patented Intensebeam™ technology, Eco NX-Silver exposes harmful microorganisms such as bacteria and other pathogens to the UV dose recommended by the NSF (National Sanitation Foundation) standard.

The Eco NX-Silver water purification system is powered by 12V DC – either directly or via 110V to 240V AC (using a power adapter). The Eco NX-Silver operates on-demand, meaning its internal flow sensor will activate UV-LEDs only when water is flowing through the system, improving energy efficiency and extending the life-time of the system.

Our mission is to provide universal access to safe drinking water and we are proud that you have chosen our solution. Enjoy the peace of mind that your Eco NX-Silver will deliver and please contact us if you have any questions.



The Eco NX-Silver is certified by IAPMO R&T to NSF/ANSI 55 Class “B” for the supplemental bacterial treatment of disinfected public drinking water or other drinking water that has been tested and deemed acceptable for human consumption by the state or local health agency having jurisdiction. The system is only designed to reduce normally occurring non-pathogenic nuisance microorganisms. Class B systems are not intended for treatment of contaminated water. It is also certified by IAPMO R&T to NSF/ANSI 372.

## Safety Information and Warnings

This section contains important information regarding the safe installation and operation of the Eco NX-Silver (the “device”).

**PLEASE READ CAREFULLY.**

Installation or operation of the device in a manner contrary to this manual may result in property damage or personal injury.

Acuva recommends that the device be installed by a qualified technician who complies with applicable state and local regulations.

## Warnings and Safety Precautions

### **DANGER**

---

Do not store the device in freezing conditions.

Do not allow water to freeze in the device.

Do not use the device if damaged or dropped.

Do not submerge the device under water.

Do not connect to AC power without an AC to DC power adapter; this device uses DC only.

This product is not ignition protected. Do not install in an engine compartment or other areas where explosive vapours may be present.

### **WARNING**

---

A steady blue indicator light (illuminating the Acuva logo) on the device and smart faucet (if installed) while water is flowing is the only indication that the water is safe to drink. If the blue light is not lit while the faucet is open, please check the “Troubleshooting” section of this manual.

The UV device includes fragile parts, including parts made from glass. The device should not be dropped and must be transported/carried with sufficient care.

Install the device in an accessible and visible location for continuous monitoring of the LED indicators and/or in case of any leakage.

### **CAUTION**

---


Minor condensation may occur on the device in humid weather and with cold water temperatures (less than the dew point temperature). Condensation drips may be noticed coming from inside the unit.

## Product Information

### Specifications

<b>Certification</b>	NSF/ANSI-55 Class "B" and NSF/ANSI 372
<b>Dose Delivery</b>	>16 mJ/cm <sup>2</sup>
<b>Certified Flow Rate</b>	1.2 L/min
<b>Water Inlet Fitting</b>	¼" OD Push-to-Connect
<b>Water Outlet Fitting</b>	¼" OD Push-to-Connect
<b>Input Voltage</b>	11-16V DC
<b>Power Consumption (Active)</b>	Approx. 14.0W
<b>Power Consumption (Standby)</b>	Approx. 0.1W
<b>Maximum Water Temperature</b>	40°C
<b>Maximum Working Pressure</b>	100 PSI
<b>Minimum Working Pressure</b>	12 PSI
<b>LED Life-time</b>	1,000 hr (on demand)
<b>Maximum Ambient Relative Humidity</b>	70%


### Overview of Your Eco NX-Silver Water Purifier

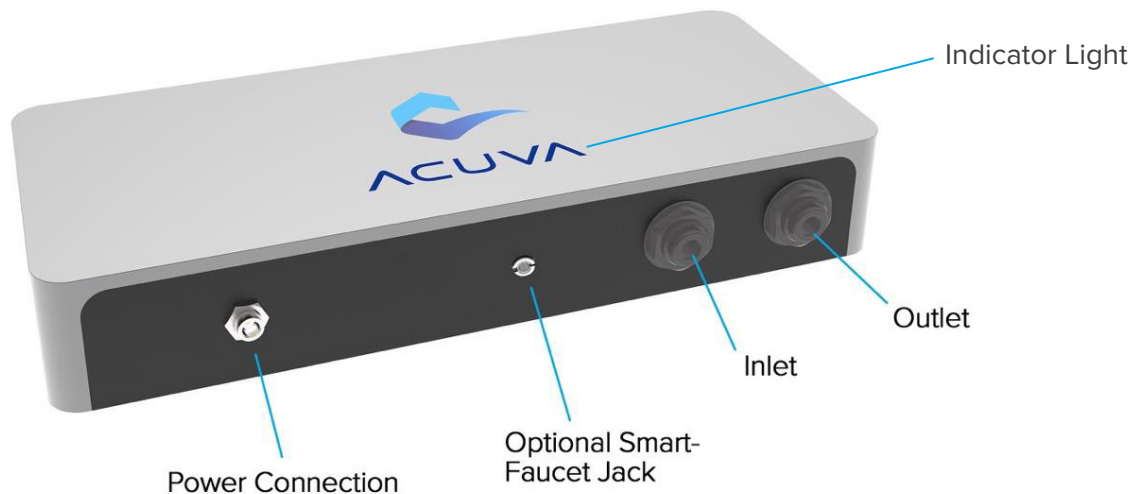


## Installation Guide

Acuva systems are designed for ease of installation. Eco systems require a flow restricter to maintain a constant flow rate.

### Installation with Smart Faucet

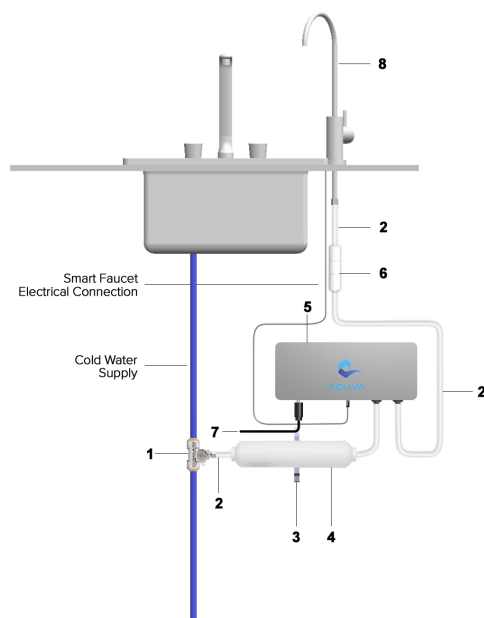

### Installation without Smart Faucet

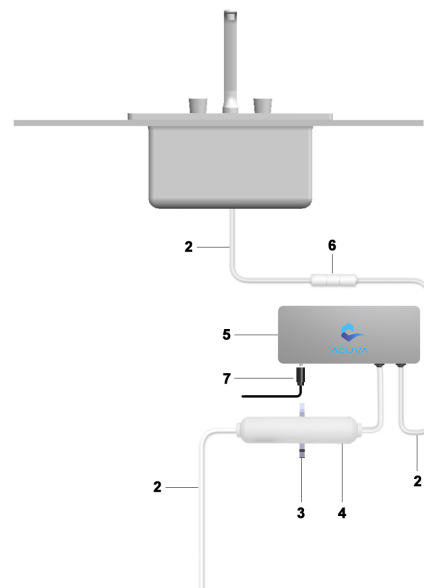

Item No.	Description	Quantity
1	½" PEX to ¼" OD Tee/Shut-off Valve	1
2	¼" OD Tube	1
3	Filter Clip	1
4	In-line filter	1
5	Eco NX-Silver*	1
6	Flow Restricter	1
7	Power Plug Cable	1
8	Smart Faucet	1

\*Item No. 5 (Eco NX-Silver) is certified for NSF 55 and 372 and other installation components are not included as part of the certification.

## Installation Guide Cont'd

### Eco NX-Silver Installation


1. Find an under-counter position for the Eco NX-Silver and pre-filter to be mounted, allowing space for all tubing to be connected without needing to bend to the point of pinching or folding.
2. Mount the DIN-rail (shown in the "Mounting the Unit" diagram) that will support the device with two #10 wood screws and the filter clips (item no. 3) for the pre-filter with the two remaining screws.
3. To install the ½" PEX-1/4" OD Tee & shutoff valve (item no. 1) to the cold-water line, ensure the cold-water line is not under pressure by turning off the water and/or cutting the flow with an upstream valve. Expect some water to drain from the cold-water line while cutting it. Insert the ½" cold-water lines to the ½" female ends of the Tee, pushing the tubes into the Tee as far as possible and pulling slightly to assure that the seal is secure.
4. Cut a length of ¼" tubing (item no. 2) that will connect the Tee to the pre-filter (item no. 4). Feed the compression nut and brass ferrule over the tubing, and insert the tubing into the tee. Use a wrench to firmly tighten the compression nut until the tubing stays in place when pulled.
5. Connect the 1/4" tube from the Tee into the inlet side of the pre-filter while making sure that water will flow in the proper direction as indicated on the filter. Push the tube into the filter as far as possible and pull slightly to ensure it is properly sealed. Snap the pre-filter into its wall-mounted clips.
6. To install the Eco NX-Silver (item no. 5), mount it to the DIN-rail as seen in the "Mounting the Unit" figure.
7. Cut a length of 1/4" tubing that will connect the pre-filter to the Eco NX-Silver's inlet and push both ends of the tubing into place.
8. Cut a length of 1/4" tubing that will connect the device and the output faucet or appliance, and install the flow restricter (item no. 6) at a point along the tube that is convenient – noting the flow direction of the restricter. Connect the tubing to the desired water faucet or appliance.

For faucet installation instructions, see Appendix A.

## Installation Guide Cont'd

### Mounting the Unit

1. Engage the spring-loaded mechanism of the mounting clips on the device by hooking the clip onto the bottom edge of the DIN-rail and applying slight pressure upwards.
2. As bottom portion engages, tilt the upper hook towards the DIN-rail.
3. Release the spring mechanism once the unit is mounted on the rail.

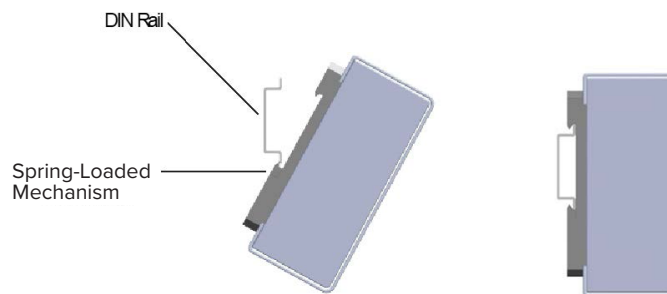

### Conditioning and Powering the Unit

1. Once the device is connected to the cold-water line, allow water to flow through the system for 1-2 minutes until any bubbles are released from the line. During this time, ensure all connections are tight and sealed.
2. Connect the DC power source or AC to DC power adapter to the device. Hand-tighten the nut to the threaded jack to secure it.

 **WARNING**

Do not use a wrench or pliers to tighten the plug or power jack as this may cause damage to the device.

3. If there is no water flow on powering up, the Acuva logo should glow green for 30 seconds.
4. Turn on the faucet. The logo will glow blue which indicates the water purification is in progress. If the smart faucet is installed, its base will glow blue as well.
5. Turn off the faucet and the device will automatically go into standby mode.



## Installation Guide Cont'd

### Indicator Light

The Acuva logo lights up to indicate various modes of use.

**No Light:** The device is idle or no power is connected.

**Blue Light:** The device is active and sterilizing water.

**Green Light:** The device is undergoing its self-cleaning protocol. This 30 second protocol occurs at start up as well as after every 12 hours of idle time and can be safely interrupted to dispense water.

**Note:** If there is a fault, the indicator light will turn red or yellow. Please consult the Troubleshooting section.

## Maintenance

The Eco NX-Silver is designed to give years of trouble-free use. Acuva products use state-of-the-art UV-LEDs, meaning there are no mercury bulbs to replace. However, there are some simple tasks that should be performed to ensure continued operation.

### Regular Maintenance

1. Check monthly that none of the connectors are leaking.
2. Replace the in-line filter after winterization or as per the instructions on the filter label.

Note: The small quartz windows inside the Eco unit do not reach high temperatures to encourage mineral build-up (scaling) as with UV lamp systems. As a result, no significant scaling or loss of performance due to scaling over time is expected.

### Winterizing

 **WARNING**

Frozen pipes mean cracked pipes. Failure to properly winterize the Acuva Eco NX-Silver before it is exposed to freezing temperatures can lead to damage and water leakage.

If the device is installed in a Recreational Vehicle (RV) ensure that the RV is winterized as per its owner's manual.

## Trouble Shooting

Indicator LED State	Fault Condition	Comments to User
Off (No water flow)	No Fault	-
Off (Water flow)	The unit is not powered	Verify that the unit is connected to power and that the input voltage is within specifications (11-16V).
	The flow direction is reversed	Ensure the inlet and outlet tubes are connected to the respective fittings marked "IN" and "OUT" on the device.
	The flow rate is too low	The flow sensor inside the unit requires a minimal water flow to activate the system (approx. 0.3 Lpm). Ensure there is enough water pressure in the line to reach this flow. (12 PSI)
Red	UV-LED fault	Unplug and plug in the device's power jack. If this fault persists, contact Acuva for support.
Yellow Blinking	Low input voltage	Verify that the input voltage is above 11 volts.

## Standard Terms and Conditions

The sale and use of all Acuva products is governed by the Acuva Technologies Inc. Standard Terms and Conditions of Sale and Use (the "Agreement"), a copy of which is available at [www.acuvatech.com](http://www.acuvatech.com).

The Agreement contains important terms that, among other things, affect Acuva's liability and your legal remedies against Acuva. Please read the Agreement carefully as, by purchasing the Acuva product, you have agreed to be bound by the entire Agreement including the limited warranty, limitations of liability and methods of resolving disputes. In the event of any inconsistency between this manual and the Agreement, the Agreement shall prevail.



## Warranty

As set out in the Agreement, Acuva products come with the following limited warranty.

### Limited Warranty

#### SCOPE AND PERIOD

Acuva warrants to you that the Product will be free from defects in materials and workmanship under normal use for 1 year from the original date of purchase by you (the "Warranty Period"). The limited warranty in this Agreement (the "Limited Warranty") is not transferable by you. All subsequent purchasers acquire the Product "as is" without benefit of the Limited Warranty. Where you purchased the Product from Acuva's Site or other online vendors the date of purchase is the date of the purchase invoice issued to you by Acuva or such online vendors by email. Where you purchased the Product from an authorized reseller at a physical location, the date of purchase is the date of the invoice issued to you at the physical location.

#### DEFECTS

In the event Acuva determines that the Product is defective, Acuva may in its discretion: (i) replace the defective Product with a new Product; or (ii) refund to you the purchase price you paid for the Product. 'DEFECTS' SECTION IS NOT APPLICABLE TO RESIDENTS OF QUEBEC.

#### REPLACEMENT

Where the Product is replaced during the Warranty Period, except as otherwise prohibited by applicable laws, the warranty for the replaced Product, as applicable, will expire upon the expiration of the original Warranty Period. Any warranty service or support under this Limited Warranty is conditioned upon your return of the Product to Acuva. Where there has been a replacement of the Product, the Product, as provided pursuant to this limited warranty, becomes your property and the Product being replaced becomes Acuva's property. Where there is a refund, you will return the Product to Acuva and such Product becomes Acuva's property. Acuva may condition a refund or replacement on you returning the product or require you to provide a credit card number, which will be charged only if you fail to return the Product. 'REPLACEMENT' SECTION IS NOT APPLICABLE TO RESIDENTS OF QUEBEC.



## Warranty Cont'd

### EXCLUSIONS

**The limited warranty does not apply:**

1. To normal wear and tear;
2. If the Product was not purchased from Acuva or its authorized retailers;
3. To damage caused by misuse, corrosion, moisture or liquids, proximity or exposure to heat or external environment, accident, abuse, misuse, neglect, improper installation or misapplication;
4. To physical damage to the Product;
5. To any software, whether or not supplied by Acuva.

## Appendix A: Faucet Installation Instructions

1. Drill a 3/4" hole into the counter-top where the Smart Faucet will be inserted.
2. Thread the faucet cable into the 3/4" hole and insert the faucet stem into the hole.
3. Thread the faucet power cord through the plastic spacer under the counter to ensure that the cord is not pinched against the counter when the faucet is fastened into place, making sure that the spacer's O-ring seal is facing up to seal against the counter.
4. Add the plastic threaded fastener to the faucet stem and tighten the fastener against the spacer to secure the faucet into place. Make sure that the faucet is positioned properly as required before tightening the fastener.
5. To connect the 1/4" water line to the faucet stem, slip the hex nut onto the tube, followed by the plastic ferrule and plastic tube support. Press the tube end and ferrule to the bottom of the faucet stem and tighten the hex nut by hand, then tighten the nut with a wrench while being careful not to over-tighten.